

Fall discounts in effect, up to \$18,000 - call Dan for details!



Superior agitation even with sand-laden manure.

- 4,200 to 7,400-Gal. haul capacities.
1600-2800 GPM discharge rates.
- Fully independent hydraulic suspension.
- Front pump system featuring AR-400 steel impeller blades and housing.
- 6" Diameter steel discharge line with double thick elbows in high-wear areas.
- In-tank, low-level agitation package keeps sand in suspension.
- Designed, engineered and manufactured by Patz Corporation, a Wisconsin, family-owned company.




Fully independent hydraulic system allows each wheel to move independently, keeping equal weight distribution. Self-steering axle(s) minimizes tire damage and stress on wheel bearings, spindles and axles. Allows for sharper turning radius with minimal tire scrubbing.



Dryhill lagoon pumps,
32' to 62' lengths.
Immediate availability.

Available with twin motors for places where 3-phase is an issue.

Agitation Nozzle Available.

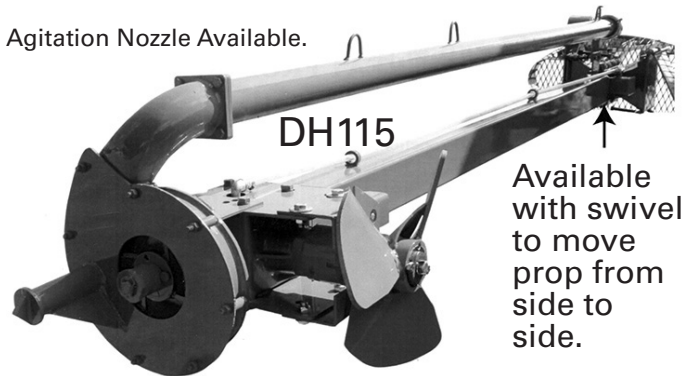

Dryhill vertical electric transfer pump.
Available 8' to 14'.



Wylie Implement

14541 Barber Creek, Kent City, MI

(616) 678-7615 • Fax (616) 678-7686 • Toll Free: 1-888-515-5050

DRYHILL Mfg